




5000nits high-brightness double-sided wall-mounted LED totem outdoor




BUILT FOR HIGH-VISIBILITY LOCATIONS

Double-sided outdoor LED advertising, visible from both directions.

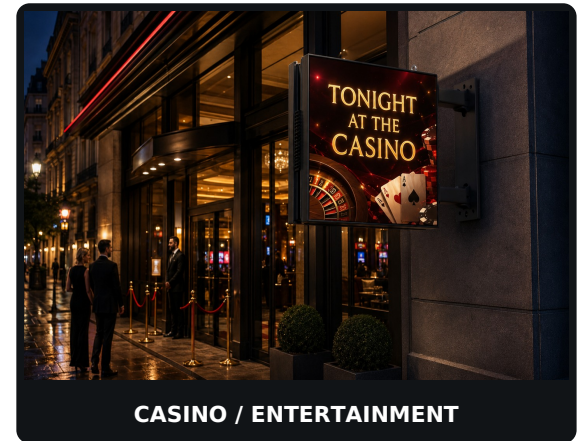

APPLICATION EXAMPLES

One compact format. Dynamic content for every high-street sector.

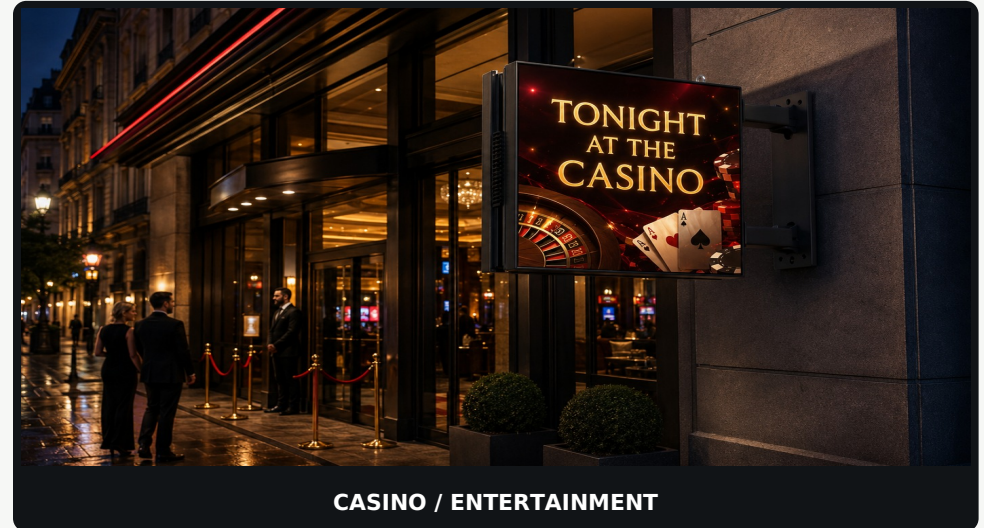

Product Parameters

Model No.	P2.5	P3.076	P4
Pixel Pitch	2.5mm	3.076mm	4mm
Pixel Density(dots/m ²)	160,000	105,625	62,500
LED Encapsulation	SMD1415		SMD1921
Pixel configuration	1R1G1B		
Scan Mode	1/13 scan	1/16 scan	1/10 scan
Module Size	320 * 160 mm		
Horizontal/Vertical Perspective	160°/120°		
Brightness (cd/m ²)	≥5500cd/m ²	≥5000cd/m ²	≥6000cd/m ²
Max. Power Consumption	720		
Ave. Power Consumption	370		
Frame rate	60		
Refresh Rate (Hz)	≥3840Hz		
Working voltage	AC: 110V/220V		
Work environment temperature	-10℃ ~ 50℃		
Work environment humidity	10% ~ 90%RH		
Service	Open the door for maintenance.		

Dimensional and structural drawings

